



# CAT. 4 - Tessuto Moss

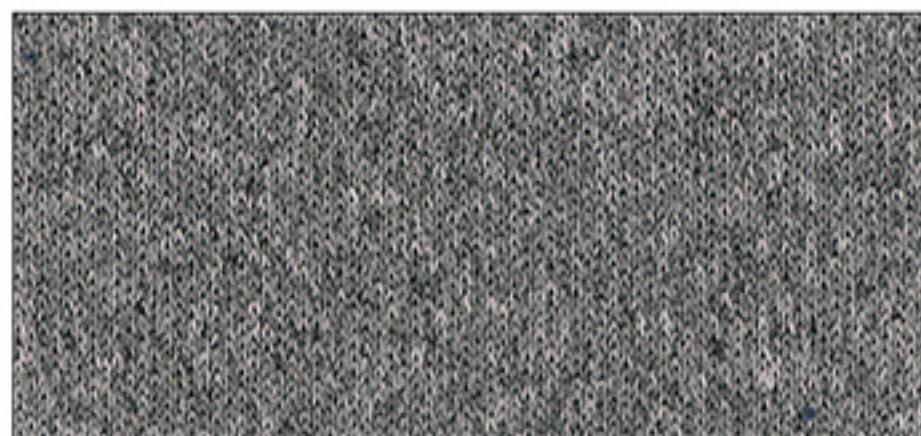


4MA

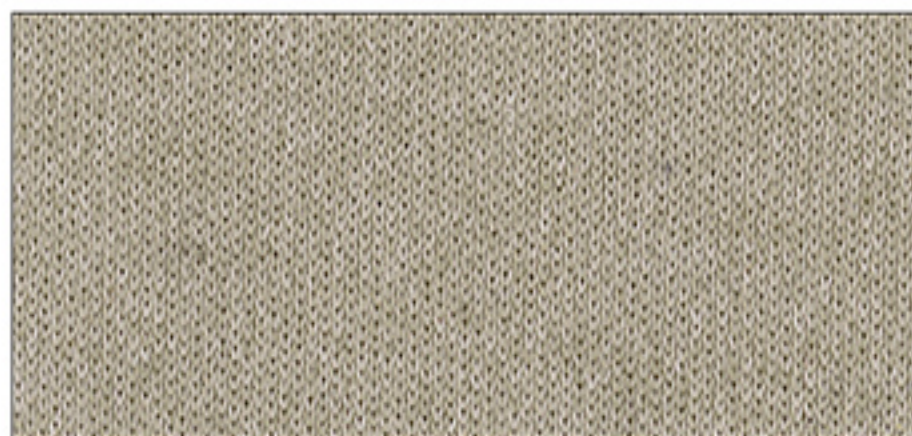


4MB




4MC

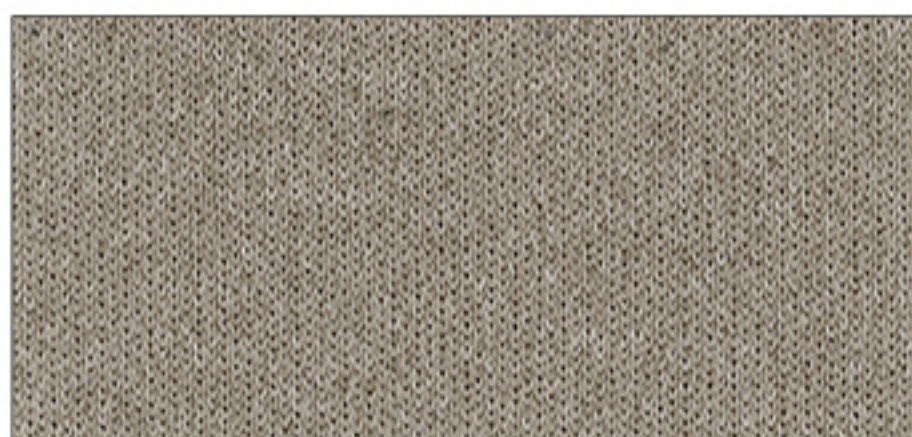


4MD

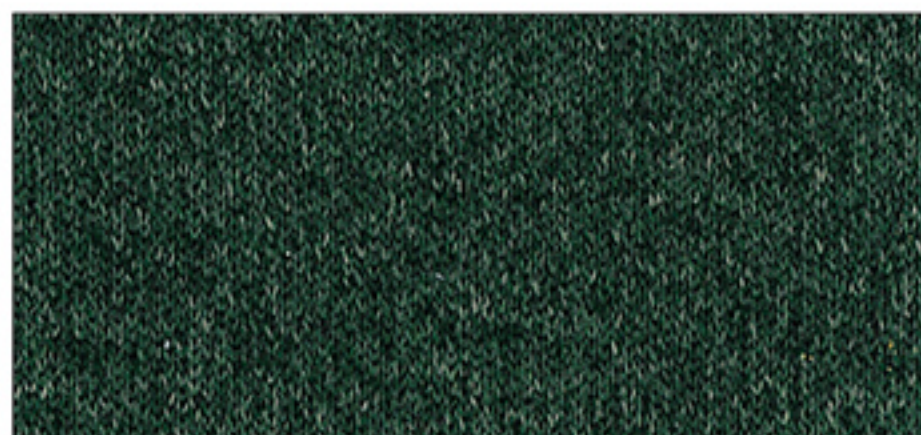


4ME

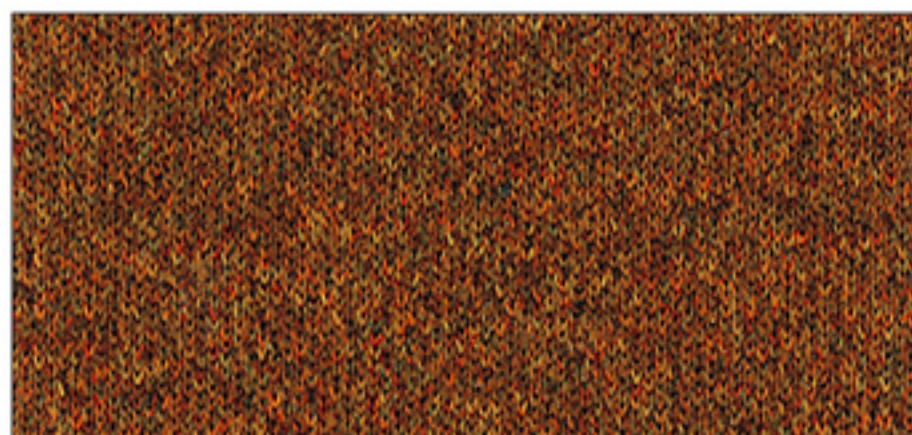

4MF

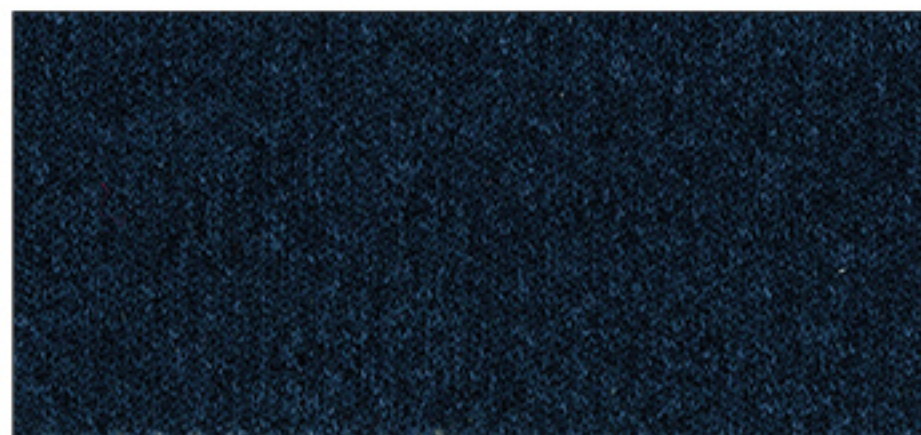

4MG

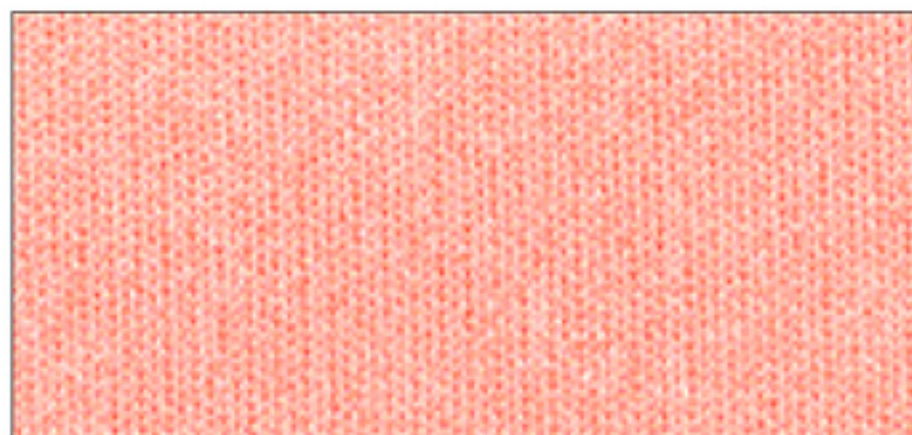

4MH

Composition	100%PES FR	
Width	175 ± 2%	
Linear Weight	854 gr/ml ± 5%	
Seam slippage resistance EN ISO 13936/2	WARP	WEFT
	1,7	2,5
Abrasion Resistance EN ISO 12947/2	End Point (A) Fully worn off (B)	
	50.000 (A)	
Pilling resistance EN ISO 12945/2	Change aspect 3000c	
	3-4	
Assessment of ignitability	BS5852 Sche. Part 4 Source 0 / 1	
	BS7176 Low hazard	
Lightfastness EN ISO 105-B02	EN 1021 Part 1 / 2	
	UNI 9175 IM Clase 1.IM	
	CAL TB 117:2013	
	NFPA 260:2013	
	DIN 4102 B2	
	NF D 60 013	
	IMO FTB 2010 Part 8 A 652 (16)	
	NF P-92:507 M1	
	PASS	
	Colour fastness to rubbing EN ISO 105-X12	DRY
5		4-5
Dimensional change in domestic washing and drying EN ISO 3759 / EN ISO 6330 / EN ISO 5077	WARP	WEFT
	-3%	1,5%
Acoustic test sound absorption	EN ISO 354:2004 EN ISO 11654:1998 ASTM C423	
Cleaning		