

# CAT. 7 - Pelle Polo



P10




P47




P72



P30

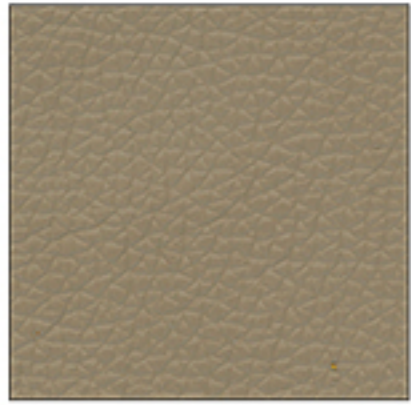

P32

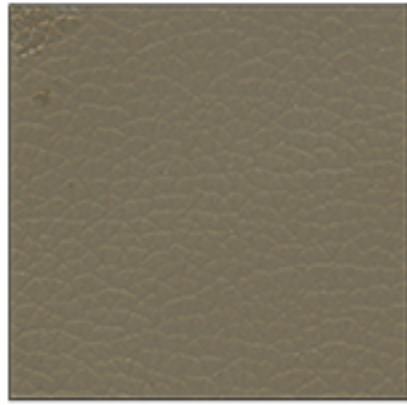

P31



P36



P39



P42



P44



P23



P24



P54




P58



P25



P84

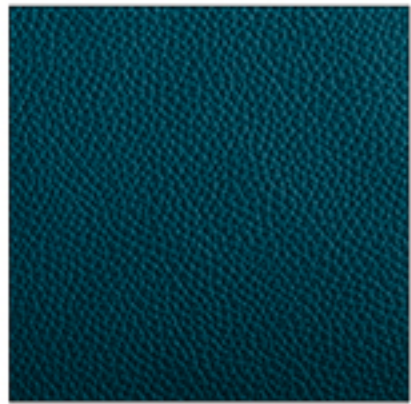

P55



P60

Thickness	0,9/1,1 mm		<b>Fire resistance</b>
Origin	Raw Hides		British Standard BS 5852 Part I (1979)
Place of origin	European		N° 0: Cigarette Test <span style="float: right;">passes</span>
Tanning	Chrome salts		N°1: Match Test
Dyeing	Aniline through - dyeing		
Finishing	Pigments finishing		
Typology	Corrected grain		
Light fastness xenon lamp	UNI EN ISO 105 B02	Value > 8 Blu scale	<b>Imo FTP part 8-Resolution A652 (16)</b>
Tear strenghe	UNI EN ISO 3377 - 1	42 N/mm	NI/0: Cigarette test NI/1: Match Test <span style="float: right;">passes</span>
Dry rub fastness	ISO 11640	500 cycles value 4/5 grey scale	
Wet rub fastness	ISO 11640	250 cycles value 4/5 grey scale	
Flex crack resistance	ISO 5402	> 50.000 cycles	
Adhesion of finish	UNI EN ISO 11644 2008 - Dedalo Srl (Arzignano - VI)	9 N/cm	<b>TB 117-A11@2013:2013</b> Cigarette Test ( California) <span style="float: right;">passes</span>