


# CAT. 9 - Pelle Savana



968




961

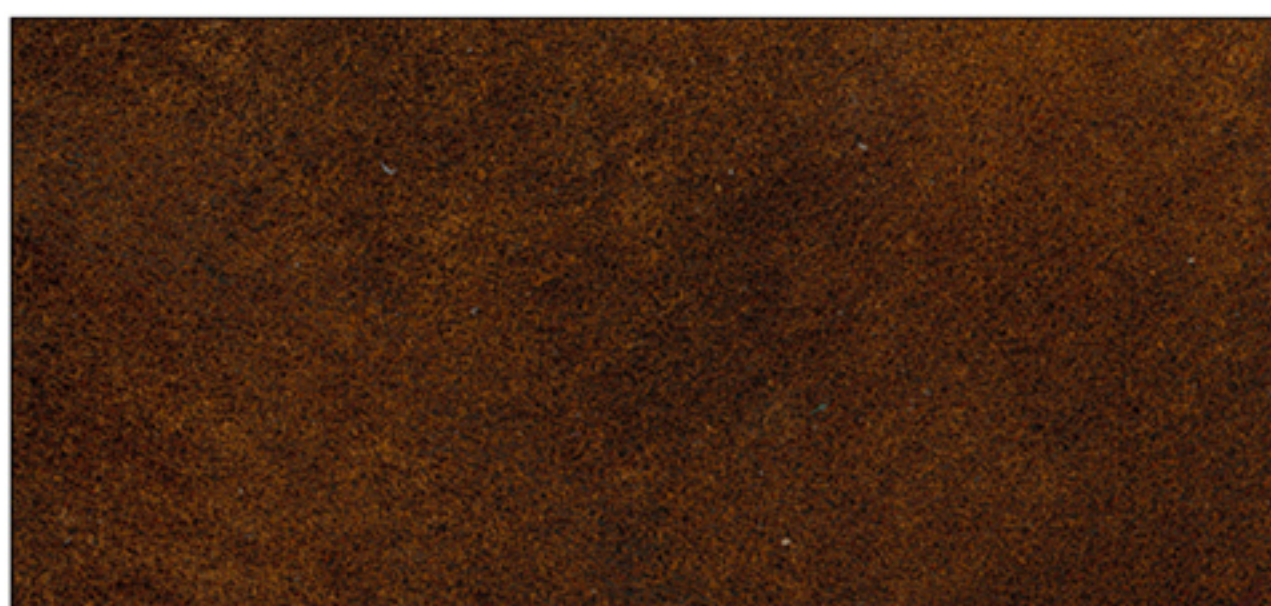


963



964

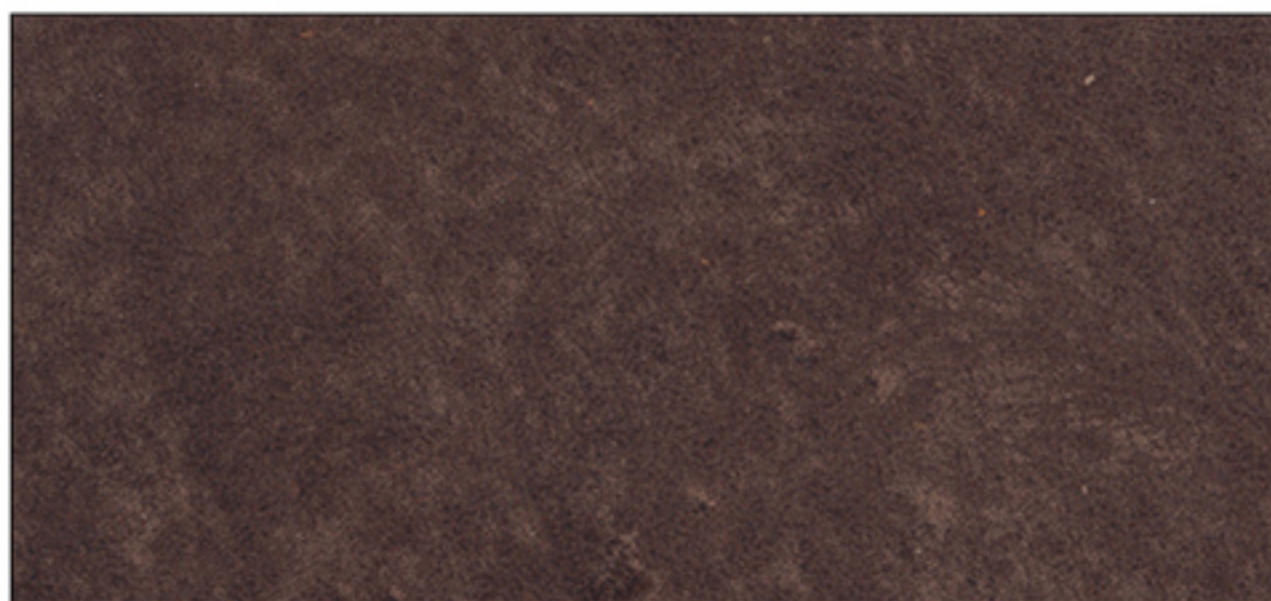

967

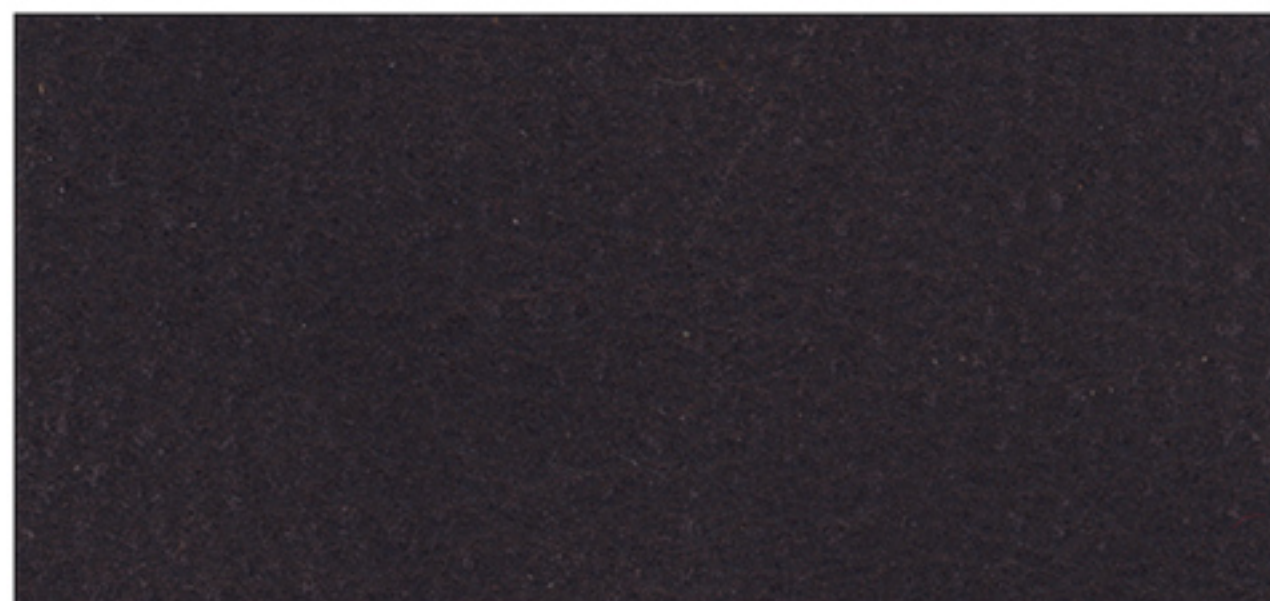

974

Thickness	1,3/1,5 mm
Origin	Raw Hides
Place of origin	European
Tanning	Chrome salts
Dyeing	Anline throught - dyeing
Typology	nubuck brushed by hand
Light fastness xenon lamp	UNI EN ISO 105 B02 Value > 3 Blu scale UNI EN ISO 3377 - 1 > 45 N
Tear strenghe	ISO 11640 500 cycles value 4 grey scale
Dry rub fastness	ISO 11640 250 cycles value 3/4 grey scale
Wet rub fastness	ISO 5402 > 50.000 cycles
Flex crack resistance	UNI EN ISO 11644 10,5 N/cm
Adhesion of finish	2008 - Dedalo Srl (Arzignano - VI)
Fire resistance	British Standard BS 5852 Part I (1979) N° 0: Cigarette Test N°1: Match Test passes

I COLORI SONO PURAMENTE INDICATIVI

COLORS ARE PURELY INDICATIVE

LES COULEURS SONT PUREMENT INDICATIVES

DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV