

# CAT. 9 - Pelle Soft



117



195



199



96




504



513



NH3

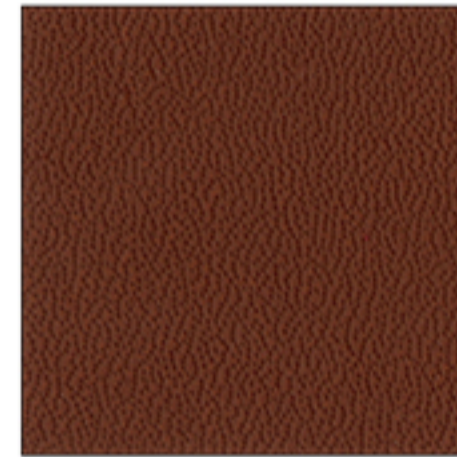

508



175



147



98



532



192



556




558




566



564

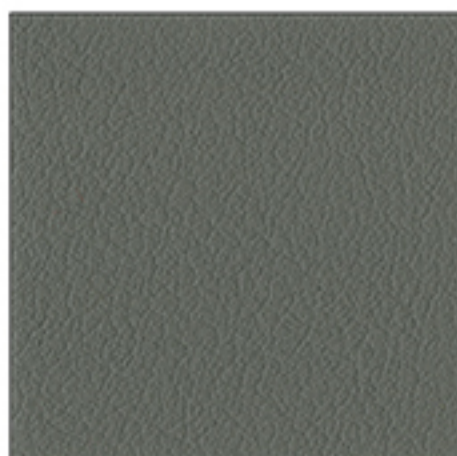

203

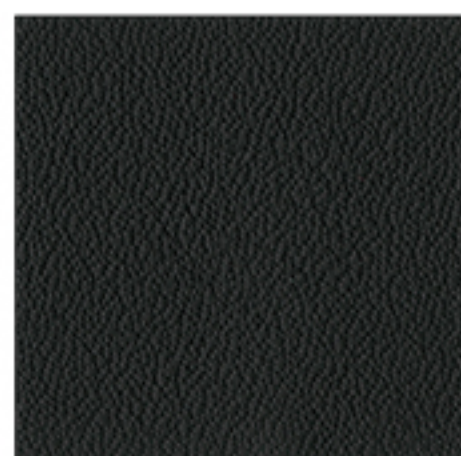

141



101

Thickness	1,1/1,2 mm	
Origin	Raw Hides	
Place of origin	European	
Tanning	Chrome salts	
Dyeing	Aniline through - dyeing	
Finishing	Water - based pigments	
Typology	Grain slightly corrected	
Light fastness xenon lamp	UNI EN ISO 105 B02	Value > 4 Blu scale
Tear strenghe	UNI EN ISO 3377 - 1	> 28 N/mm
Dry rub fastness	ISO 11640	500 cycles value 4 grey scale
Wet rub fastness	ISO 11640	80 cycles value 5 grey scale
Flex crack resistance	ISO 5402	25000 cycles
Adhesion of finish	UNI EN ISO 11644 2008 - Dedalo Srl (Arzignano - VI)	> 7,5 N/cm
Fire resistance	British Standard BS 5852 Part I (1979) N° 0: Cigarette Test N°1: Match Test	pass